


03515SS

DC Axial Fan Sleeve Bearing


35[□]X15^L



外观图 Outline

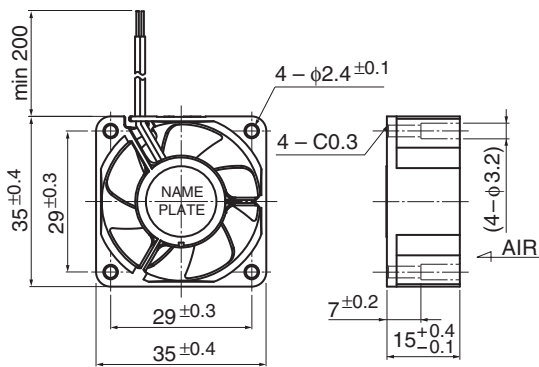

特性曲线 Characteristic Curves

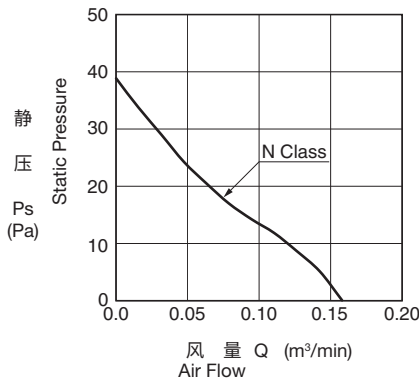

规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
03515SS-05N-AA-	00	5	4.5 ~ 5.5	0.19	0.95	8000	0.16 5.7	35.0 0.14	24.0	12.5
03515SS-12N-AA-	00	12	6.0 ~ 13.2	0.07	0.84	8000	0.16 5.7	35.0 0.14	24.0	12.5

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air

一般规格 General Specifications


- 电机保护: 自动复位、反接保护
Motor Protection: Auto Restart / Polarity Protection
- 绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
- 绝缘耐压: AC700V 1s
Dielectric Withstand Voltage: AC700V 1s
- 容许环境温度范围: -10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range: -40°C ~ +70°C (Storage)
- 正常使用状态下应无结露
non-condensing environment

预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
40°C 30,000小时(Hours)

安装孔参考图 Panel Out-cuts

排气侧(Outlet Side)



材质 Material

- 壳体: 塑料(黑色)UL94V-0
- 叶轮: 塑料(黑色)UL94V-0
- 轴承: 含油轴承
- 导线: UL1061 AWG26 +: 红 -: 黑
- Casing: Plastic (Black) UL94V-0
- Impeller: Plastic (Black) UL94V-0
- Bearing: Sleeve Bearing
- Lead Wire: UL1061 AWG26 +: Red, -: Black