


04028DA (H-Type Single Phase) 40[□]X28^L

DC Axial Fan



■ 外观图 Outline

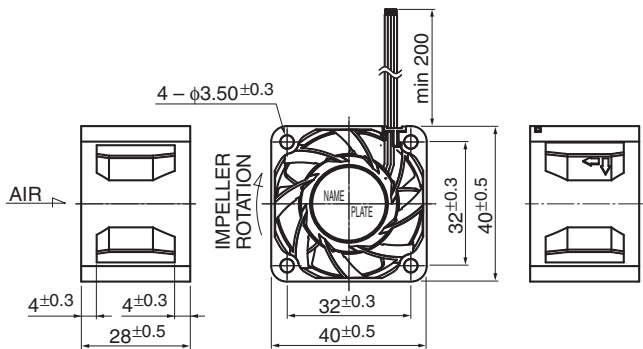


■ 一般规格 General Specifications

- 电机保护: 自动复位、反接保护
Motor Protection: Auto Restart / Polarity Protection
- 绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
- 绝缘耐压: AC700V 1s
Dielectric Withstand Voltage
- 容许环境温度范围: P, Q, R, S Class: -10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range: -40°C ~ +70°C (Storage)
- 正常使用状态下应无结露
non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
40°C 70,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

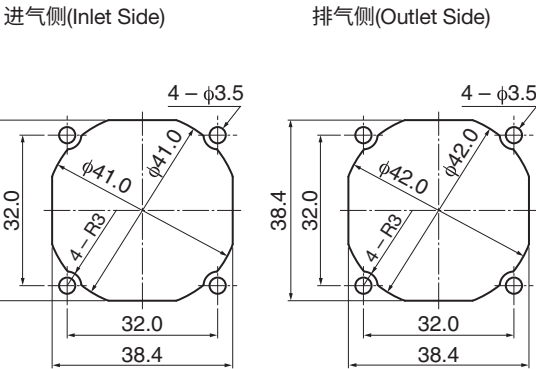

■ 特性曲线 Characteristic Curves

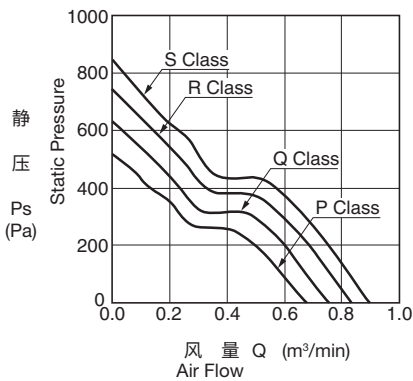

■ 材质 Material

- 壳体: 塑料(黑色)UL94V-0
- 叶轮: 塑料(黑色)UL94V-0
- 轴承: 滚珠轴承
- 导线: UL10368 AWG26 +: 红 - : 黑
- Casing: Plastic (Black) UL94V-0
- Impeller: Plastic (Black) UL94V-0
- Bearing: Ball Bearing
- Lead Wire: UL10368 AWG26 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
04028DA-12P-AAH-	00	12	10.8 ~ 13.2	0.51	6.12	18000	0.68 24.0	518.0 2.08	58.0	49
04028DA-12Q-AAH-	00			0.66	7.92	20000	0.76 26.8	630.0 2.52	60.0	
04028DA-12R-AAH-	00			0.85	10.20	22000	0.84 29.7	745.0 2.99	62.0	
04028DA-12S-AAH-	00			1.08	12.96	23500	0.89 31.4	840.0 3.37	64.0	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air