

04056DA


DC Axial Fan

40[□]X56^L

■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection:	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment


■ 外观图 Outline

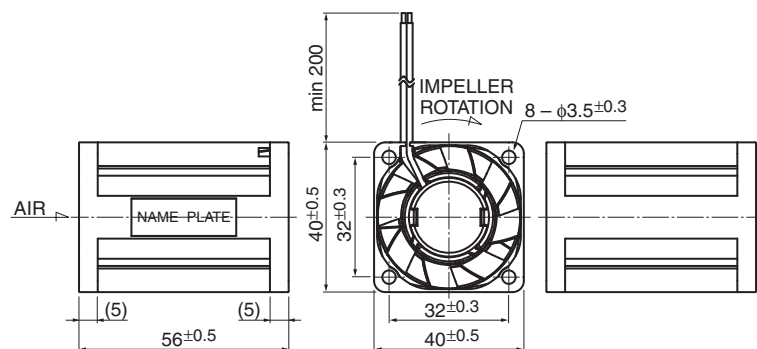


■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)

排气侧(Outlet Side)

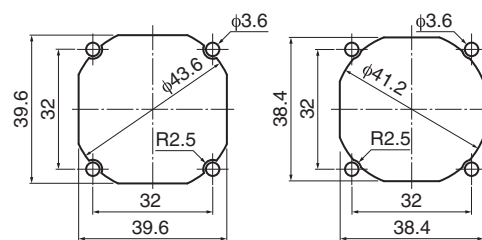

■ 特性曲线 Characteristic Curves

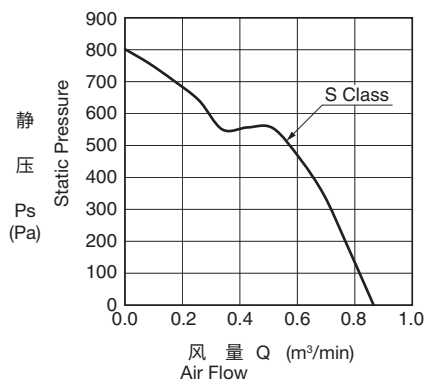

■ 材质 Material

壳体 : 塑料(黑色)UL94V-0
 叶轮 : 塑料(黑色)UL94V-0
 轴承 : 滚珠轴承
 导线 : UL10368 AWG26 + : 红 - : 黑

Casing : Plastic (Black) UL94V-0
 Impeller : Plastic (Black) UL94V-0
 Bearing : Ball Bearing
 Lead Wire : UL10368 AWG26 + : Red, - : Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
04056DA-12S-E1-	00	12	10.8 ~ 13.2	1.05	12.60	23000	0.86 30.4	800.0 3.21	63.0	62

旋转方向: 从固定叶片观察时为顺时针方向 Rotation: Clockwise as seen from the Fixed Blade side
 送风方向: 固定叶片侧 Airflow Outlet: Fixed Blade side

^{*1}: Average Values in Free Air