

DC Axial Fan Sleeve Bearing

50[□]X15^L





■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage	
容许环境温度范围:	-10°C ~ +70°C (Operating)
Allowable Ambient	-40°C ~ +70°C (Storage)
Temperature Range	正常使用状态下应无结露 non-condensing environment


■ 外观图 Outline

■ **预期寿命** ※故障率10% (L10 使用寿命)
Expected Life ※Failure Rate: 10% (L10 Life)
 40°C 40,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

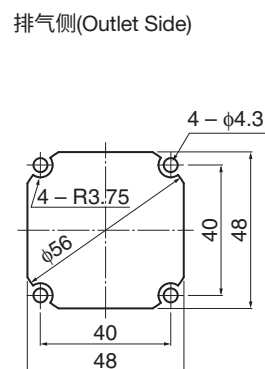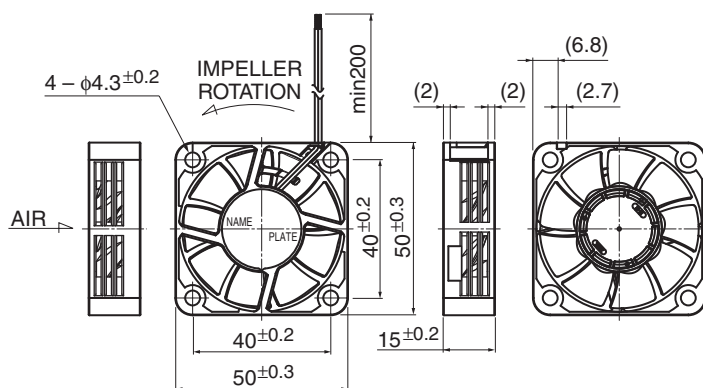

■ 特性曲线 Characteristic Curves

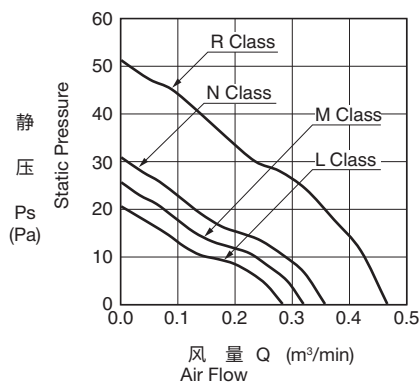

■ 材质 Material

壳体 : 塑料(黑色)UL94V-0
 叶轮 : 塑料(黑色)UL94V-0
 轴承 : 含油轴承
 导线 : UL1061 AWG26 + : 红 - : 黑

Casing : Plastic (Black) UL94V-0
Impeller : Plastic (Black) UL94V-0
Bearing : Sleeve Bearing
Lead Wire: UL1061 AWG26 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压	工作电压范围	额定电流	额定输入	额定转速	最大风量		最大静压		噪音	重量
		Rating Voltage	Operating Voltage	Current	Input Power	Speed	Max. Air Flow		Max. Static Pressure		Noise	Mass
		(V)	(V)	(A)* ¹	(W)* ¹	(min ⁻¹)* ¹	(m ³ /min)* ¹	(CFM)* ¹	(Pa)* ¹	(In H ₂ O)* ¹	(dB)* ¹	(g)
05015SS-12L-WA-	D0	12	6.0 ~ 13.8	0.05	0.60	4050	0.25	8.8	20.0	0.08	22.0	25
05015SS-12M-WA-	D0			0.06	0.72	4550	0.28	9.9	25.0	0.10	25.0	
05015SS-12N-WA-	D0			0.07	0.84	5050	0.31	10.9	31.0	0.12	27.5	
05015SS-12R-WA-	D0			0.14	1.68	6550	0.42	14.8	51.0	0.20	35.5	
05015SS-24L-WA-	D0	24	12.0 ~ 26.4	0.035	0.84	4050	0.25	8.8	20.0	0.08	22.0	
05015SS-24M-WA-	D0			0.04	0.96	4550	0.28	9.9	25.0	0.10	25.0	
05015SS-24N-WA-	D0			0.05	1.20	5050	0.31	10.9	31.0	0.12	27.5	
05015SS-24R-WA-	D0			0.09	2.16	6550	0.42	14.8	51.0	0.20	35.5	

旋转方向: 从标签方向观察时为逆时针方向 Rotation: Counter clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air