


06025MA

DC Axial Fan Ball Bearing


60[□]X25^L

■ 外观图 Outline

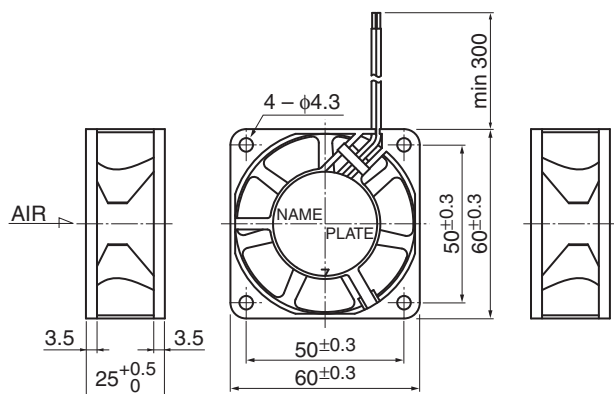

* 产品外观图为A(加强筋)型 Outline is A (Rib) type.

■ 特性曲线 Characteristic Curves

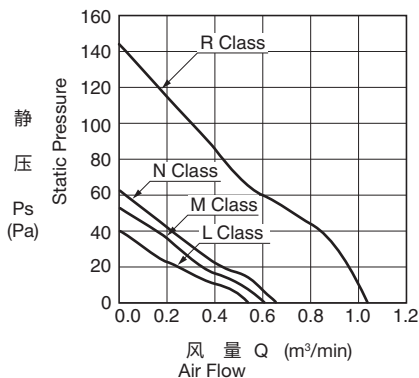


■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection:	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	L, M, N Class: -10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range:	R Class: -10°C ~ +60°C (Operating)
	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment

■ 预期寿命 Expected Life

25°C 100,000小时 (Hours) (L ~ N Class)
25°C 90,000小时 (Hours) (R Class)

■ 安装孔参考图 Panel Out-cuts

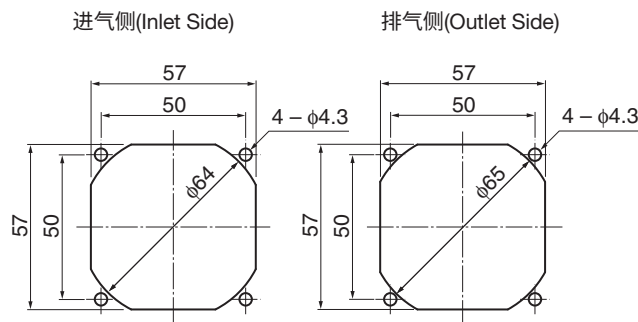

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 滚珠轴承
导线	: UL1007 AWG24 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Ball Bearing
Lead Wire	: UL1007 AWG24 +: Red, -: Black

* 可按订制要求, 提供IP防水、防油解决方案, 详情请咨询。
Customize service for IP compatible type and Oil-proof type is available for this item.
Please contact to our sales representative for more detail.

■ 规格 Specifications

□=壳体形状 Casing Form --- A: 加强筋型 Rib Type、E: 法兰型 Flange Type

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
06025MA-12L-□A-	00	12	6.0 ~ 13.8	0.12	1.44	4000	0.54	19.1	40.2	31.0
06025MA-12M-□A-	00			0.17	2.04	4550	0.61	21.5	51.9	33.5
06025MA-12N-□A-	00			0.20	2.40	4900	0.66	23.3	62.2	35.0
06025MA-12R-□A-	00			0.54	6.48	7350	1.05	37.1	143.0	50.0
06025MA-24L-□A-	00	24	10.0 ~ 27.6	0.06	1.44	4000	0.54	19.1	40.2	31.0
06025MA-24M-□A-	00			0.09	2.16	4550	0.61	21.5	51.9	33.5
06025MA-24N-□A-	00			0.10	2.40	4900	0.66	23.3	62.2	35.0
06025MA-24R-□A-	00			0.26	6.24	7350	1.05	37.1	143.0	50.0

旋转方向: 从标签方向观察时为逆时针方向 Rotation: Counter clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air