

06025VC Aluminum

DC Axial Fan


60[□]X25^L



■ 一般规格 General Specifications

- 电机保护: 自动复位、反接保护
Motor Protection: Auto Restart / Polarity Protection
- 绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
- 绝缘耐压: AC700V 1s
Dielectric Withstand Voltage: AC700V 1s
- 容许环境温度范围: -10°C ~ +85°C (Operating)
Allowable Ambient Temperature Range: -40°C ~ +85°C (Storage)
- 正常使用状态下应无结露
non-condensing environment


■ 外观图 Outline

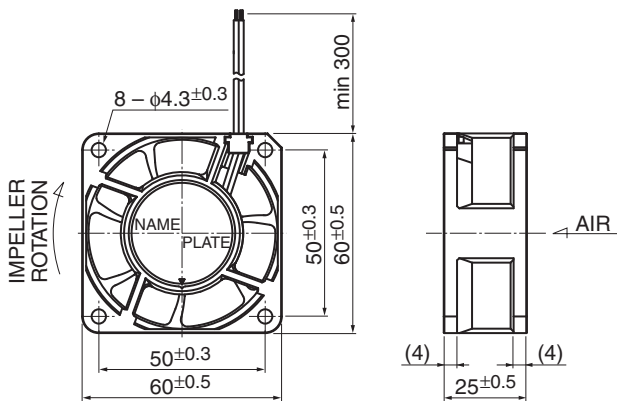


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
85°C 40,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

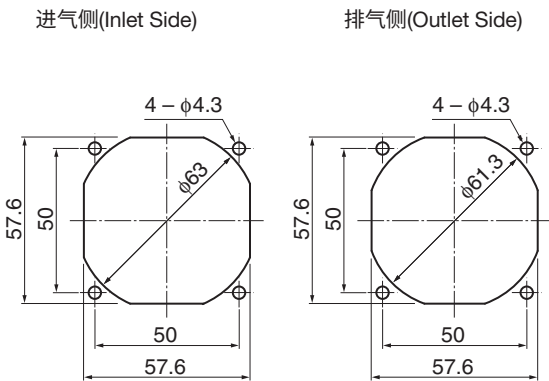

■ 特性曲线 Characteristic Curves

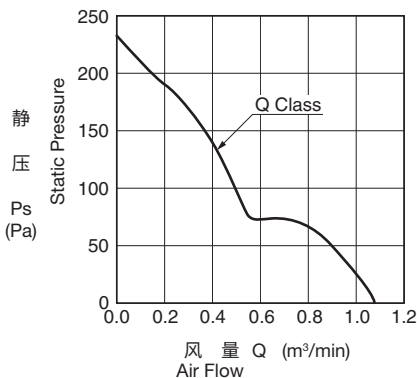

■ 材质 Material

- 壳体: 铝合金(无涂装)
- 叶轮: 塑料(黑色)UL94V-0
- 轴承: 滚珠轴承
- 导线: UL3266 AWG24 +: 红 -: 黑
- Casing: Aluminum (No Paint)
- Impeller: Plastic (Black) UL94V-0
- Bearing: Ball Bearing
- Lead Wire: UL3266 AWG24 +: Red, -: Black

*可按订制要求, 提供IP防水、防油解决方案, 详情请咨询。
Customize service for IP compatible type and Oil-proof type is available for this item.
Please contact to our sales representative for more detail.

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
06025VC-12Q-WA-	A0	12	10.0 ~ 13.2	0.55	6.60	9200	1.09 38.5	235.0 0.94	53.0	90
06025VC-24Q-WA-	A0	24	10.0 ~ 26.0	0.25	6.00	9200	1.09 38.5	235.0 0.94	53.0	

旋转方向: 从标签方向观察时为顺时针方向
送风方向: 标签侧
Rotation: Clockwise as seen from the label side
Airflow Outlet: Label side

*1: Average Values in Free Air