

06038DA (Three Phase)


DC Axial Fan

60[□]X38^L

■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection:	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range:	-30°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment


■ 外观图 Outline

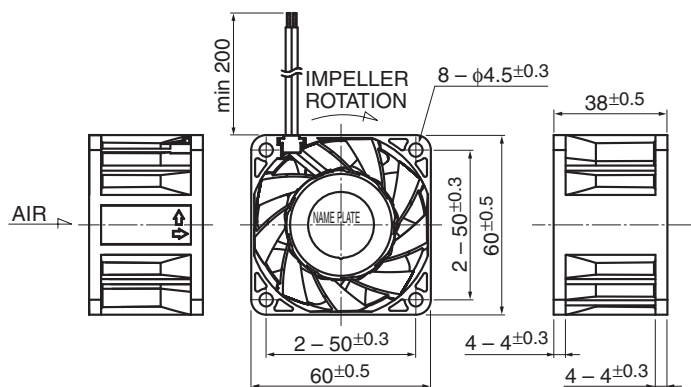


■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)

排气侧(Outlet Side)

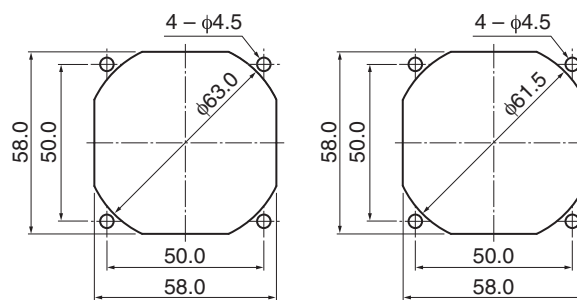

■ 特性曲线 Characteristic Curves

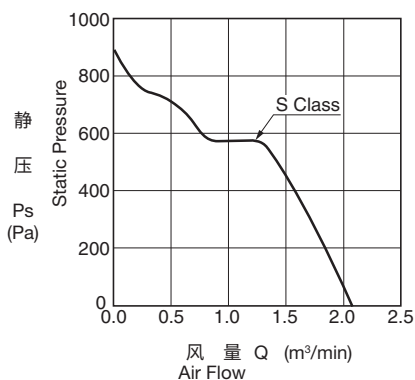

■ 材质 Material

壳体 : 塑料(黑色)UL94V-0
 叶轮 : 塑料(黑色)UL94V-0
 轴承 : 滚珠轴承
 导线 : UL10368 AWG24 +: 红 - : 黑

Casing : Plastic (Black) UL94V-0
 Impeller : Plastic (Black) UL94V-0
 Bearing : Ball Bearing
 Lead Wire : UL10368 AWG24 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
06038DA-12S-E1L-	0	12	8.0 ~ 13.2	2.30	27.60	17000	2.07 73.1	887.0 3.55	66.5	125

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
 送风方向: 标签侧 Airflow Outlet: Label side

^{*1}: Average Values in Free Air