


06038RA (旧2415RL)

DC Axial Fan


60[□]X38^L



■ 外观图 Outline

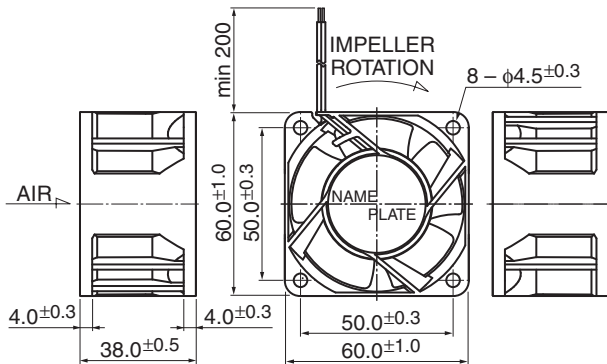

■ 特性曲线 Characteristic Curves

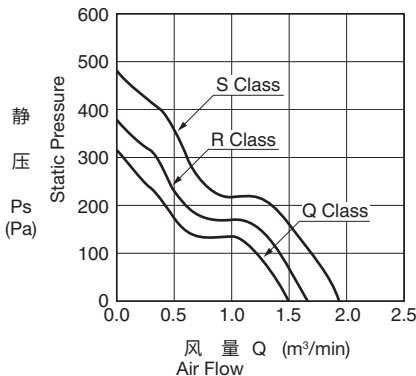

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压	工作电压范围	额定电流	额定输入	额定转速	最大风量		最大静压		噪音	重量
		Rating Voltage (V)	Operating Voltage (V)	Current (A) ^{*1}	Input Power (W) ^{*1}	Speed (min ⁻¹) ^{*1}	Max.Air Flow (m³/min) ^{*1} (CFM) ^{*1}	Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	Noise (dB) ^{*1}	Mass (g)		
06038RA-12Q-EA-	00	12	7 ~ 13.8	0.77	9.24	10000	1.51	53.3	308.3	1.23	125	
06038RA-12R-EA-	00			1.00	12.00	11000	1.67	59.0	380.0	1.52		58.0
06038RA-12S-EA-	00		10.8 ~ 13.2	1.45	17.40	12500	1.93	68.1	480.0	1.92		61.0
06038RA-24Q-EA-	00	24	15 ~ 26.4	0.43	10.32	10000	1.51	53.3	308.3	1.23	125	
06038RA-24R-EA-	00			0.55	13.20	11000	1.67	59.0	380.0	1.52		58.0
06038RA-24S-EA-	00			0.77	18.48	12500	1.93	68.1	480.0	1.92		61.0

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air

■ 一般规格 General Specifications

电机保护: 自动复位、反接保护
Motor Protection: Auto Restart / Polarity Protection
绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
绝缘耐压: AC700V 1s
Dielectric Withstand Voltage
容许环境温度范围: Q, R class: -10°C ~ +70°C(Operating)
Allowable Ambient Temperature Range: S class: -10°C ~ +70°C(Operating: 12V)
S class: -10°C ~ +60°C(Operating: 24V)
-40°C ~ +70°C(Storage)
正常使用状态下应无结露
non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)

※Failure Rate: 10% (L10 Life)

25°C 80,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

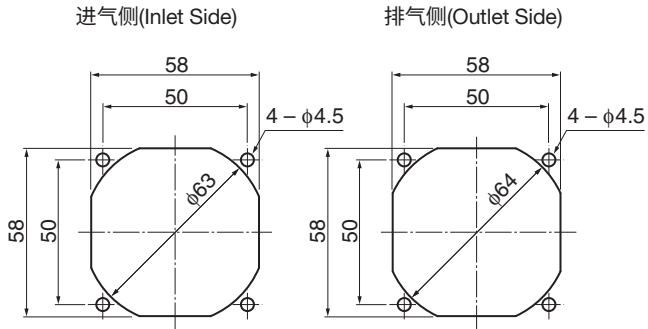

■ 材质 Material

壳体: 塑料(黑色)UL94V-0
叶轮: 塑料(黑色)UL94V-0
轴承: 滚珠轴承
导线: UL10368 AWG24 +: 红 - : 黑

Casing: Plastic (Black) UL94V-0
Impeller: Plastic (Black) UL94V-0
Bearing: Ball Bearing
Lead Wire: UL10368 AWG24 +: Red, -: Black

*可按订制要求, 提供IP防水、防油解决方案, 详情请咨询。
Customize service for IP compatible type and Oil-proof type is available for this item.
Please contact to our sales representative for more detail.