


06615JS for Evaporator

DC Axial Fan

66[□]X15^L



■ 外观图 Outline

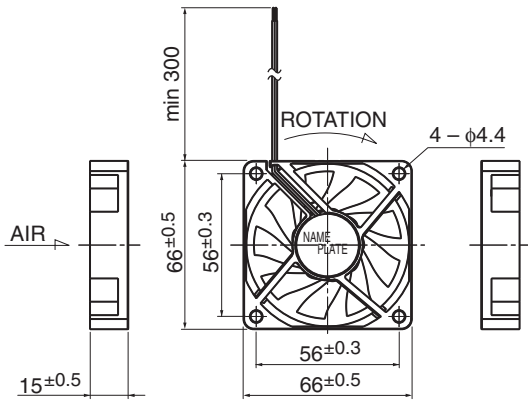


■ 一般规格 General Specifications

电机保护:	自动复位
Motor Protection:	Auto Restart
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-40°C ~ +40°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +60°C (Storage)
	正常使用状态下应无结露 non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
25°C 40,000 小时(Hours)

■ 安装孔参考图 Panel Out-cuts

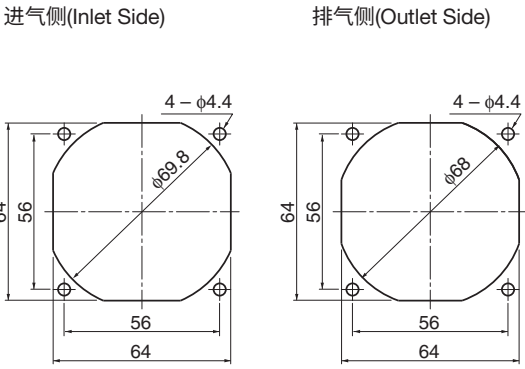

■ 特性曲线 Characteristic Curves

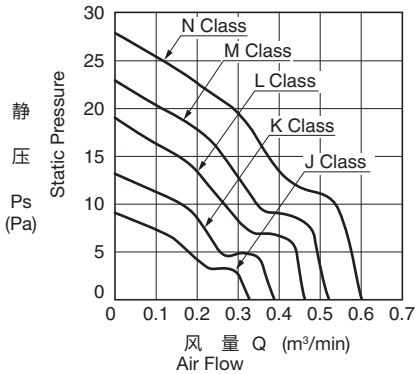

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 含油轴承
导线	: UL1061 AWG24 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Sleeve Bearing
Lead Wire	: UL1061 AWG24 +: Red, -: Black

■ 规格 Specifications

型号 Model		管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max. Air Flow (m³/min)*1 (CFM)*1		最大静压 Max. Static Pressure (Pa) (In H ₂ O)		噪音 Noise (dB)*1	重量 Mass (g)
06615JS-12J-BA-	F0	12	7.0 ~ 13.2	0.04	0.48	2600	0.33	11.7	9.1	0.04	22.5	42	
06615JS-12K-BA-	F0			0.06	0.72	3100	0.39	13.8	13.2	0.05	27.5		
06615JS-12L-BA-	F0			0.08	0.96	3600	0.45	15.9	19.0	0.08	32.0		
06615JS-12M-BA-	F0			0.12	1.44	4100	0.52	18.4	23.0	0.09	35.5		
06615JS-12N-BA-	F0			0.19	2.28	4600	0.60	21.2	28.0	0.11	39.0		

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air