

08025DA (D-Type)


DC Axial Fan

80[□]X25^L



参考规格
Reference Spec

■ 外观图 Outline

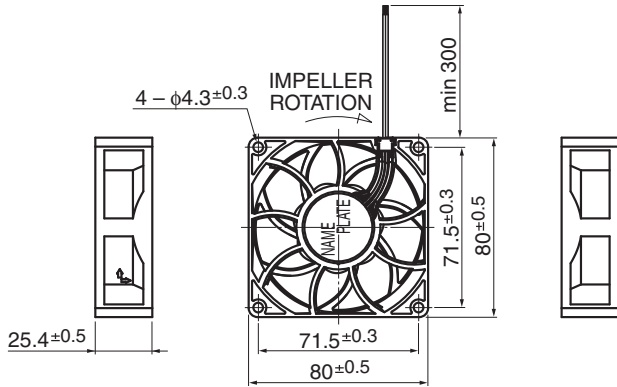


■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage	
容许环境温度范围:	-10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
40°C 70,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

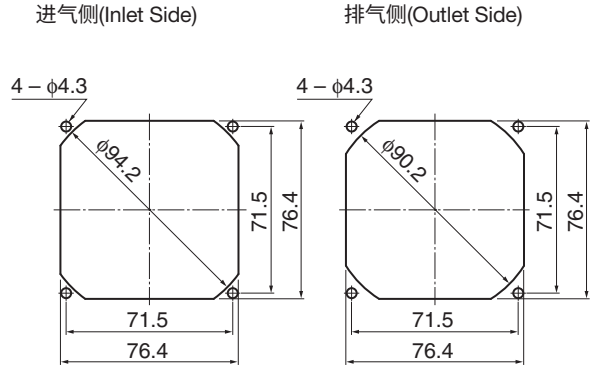

■ 特性曲线 Characteristic Curves

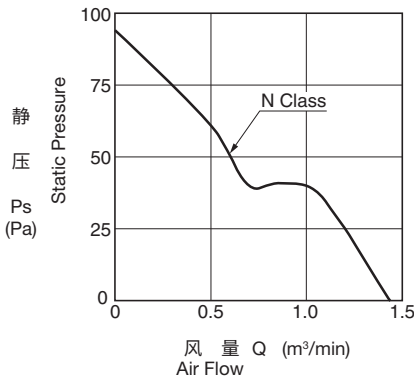

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 滚珠轴承
导线	: UL10368 AWG24 +: 红 -: 黑

Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Ball Bearing
Lead Wire	: UL10368 AWG24 +: Red, -: Black

* 也可提供可变速型。
其他要求请另行咨询。
Variable speed type is also available.
Please inquire regarding the other requirements.

* 可按订制要求, 提供IP防水、防油解决方案, 详情请咨询。
Customize service for IP compatible type and Oil-proof type is available for this item.
Please contact to our sales representative for more detail.

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max. Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) ^{*1} (In H ₂ O) ^{*1}	噪音 Noise (dB) ^{*1}	重量 Mass (g)
08025DA-24N-AAD-	00	24	18 ~ 26.4	0.11	2.6	5250	1.40 49.5	94.0 0.37	42.0	135

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air

以上为参考规格, 最终规格可能会有变更。
This information is reference spec, so final spec may change.