

09232JS for Evaporator

DC Axial Fan

92[□]X32^L

DC FAN

General purpose

Industrial


Server

Refrigerator

Blower



■ 外观图 Outline

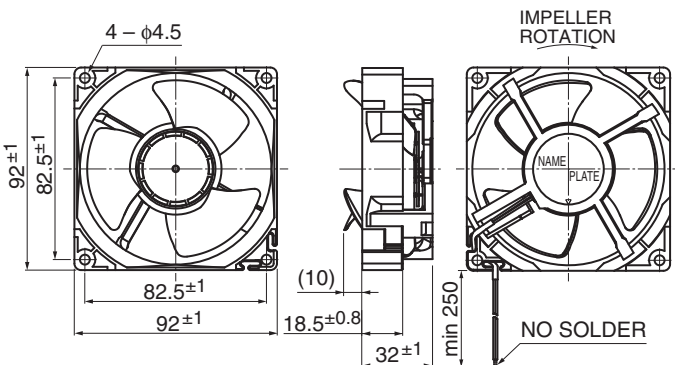

■ 一般规格 General Specifications


电机保护:	自动复位
Motor Protection:	Auto Restart
绝缘电阻:	用DC500V兆欧表测量, 应在10M Ω 以上
Insulation Resistance:	10M Ω or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-40°C ~ +40°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment

■ 预期寿命 Expected Life


※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
-20°C 70,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)



■ 特性曲线 Characteristic Curves

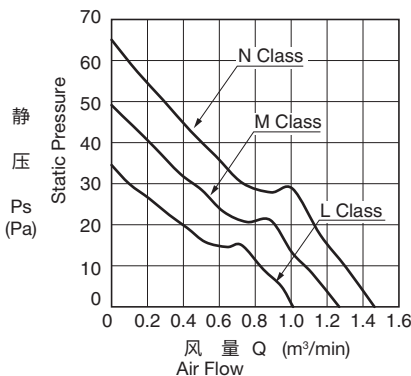

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 含油轴承
导线	: UL1007 AWG24 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Sleeve Bearing
Lead Wire	: UL1007 AWG24 +: Red, -: Black

■ 规格 Specifications

型号 Model		管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max. Air Flow (m ³ /min)*1 (CFM)*1		最大静压 Max. Static Pressure (Pa) (In H ₂ O)		噪音 Noise (dB)*1	重量 Mass (g)
09232JS-12L-BA-	F0	12	12	7.0 ~ 13.8	0.07	0.84	2800	1.00	35.3	35.0	0.14	27.0	118
09232JS-12M-BA-	F0			0.12	1.44	3350	1.26	44.5	49.0	0.20	32.0		
09232JS-12N-BA-	F0			7.0 ~ 12.6	0.17	2.04	3900	1.45	51.2	65.0	0.26	36.5	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air