


11338JE for Evaporator

DC Axial Fan

113[□]X36^L



■ 外观图 Outline

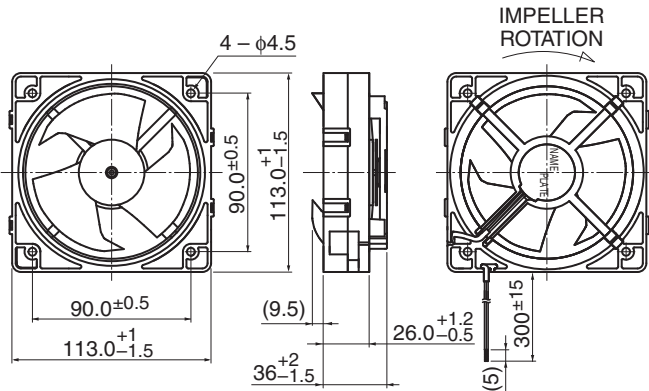


■ 一般规格 General Specifications

- 电机保护: 自动复位
Motor Protection: Auto Restart
- 绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
- 绝缘耐压: AC700V 1s
Dielectric Withstand Voltage: AC700V 1s
- 容许环境温度范围: -40°C ~ +40°C (Operating)
Allowable Ambient Temperature Range: -40°C ~ +70°C (Storage)
- 正常使用状态下应无结露
non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
-20°C 70,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

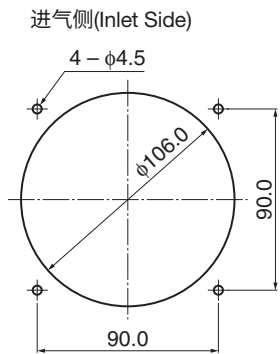

■ 特性曲线 Characteristic Curves

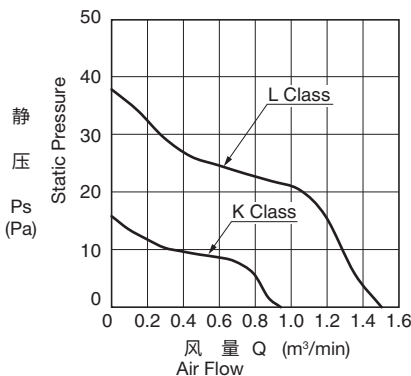

■ 材质 Material

- 壳体: 塑料(黑色)UL94V-0
Casing: Plastic (Black) UL94V-0
- 叶轮: 塑料(绿色)UL94HB
Impeller: Plastic (Green) UL94HB
- 轴承: 滚珠轴承
Bearing: Ball Bearing
- 导线: UL1007 AWG26 +: 红 -: 黑
Lead Wire: UL1007 AWG26 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A) ^{*1}	额定输入 Input Power (W) ^{*1}	额定转速 Speed (min ⁻¹) ^{*1}	最大风量 Max.Air Flow (m³/min) ^{*1} (CFM) ^{*1}	最大静压 Max. Static Pressure (Pa) (In H ₂ O)	噪音 Noise (dB) ^{*1}	重量 Mass (g)
11338JE-12K-BA-	F0	12	7.0 ~ 13.8	0.06	0.72	1920	0.94 33.2	15.9 0.06	21.5	170
11338JE-12L-BA-	F0			0.13	1.56	2900	1.50 53.0	38.0 0.15	32.5	

旋转方向: 从标签方向观察时为顺时针方向
Rotation: Clockwise as seen from the label side

*1: Average Values in Free Air

送风方向: 标签侧
Airflow Outlet: Label side