

12539JE for Evaporator

DC Axial Fan


125[□]X39^L



■ 一般规格 General Specifications

电机保护:	自动复位
Motor Protection:	Auto Restart
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-40°C ~ +40°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment

■ 外观图 Outline

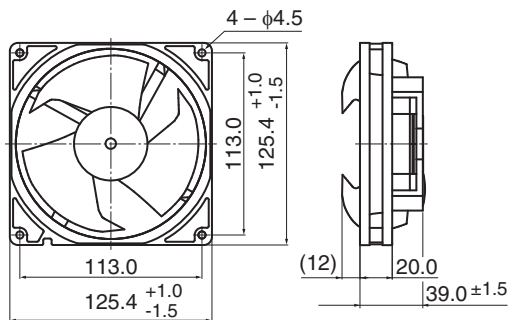


■ 预期寿命 Expected Life


※故障率10% (L10使用寿命)
※Failure Rate: 10% (L10 Life)
-20°C 70,000小时 (Hours)

■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)



■ 特性曲线 Characteristic Curves

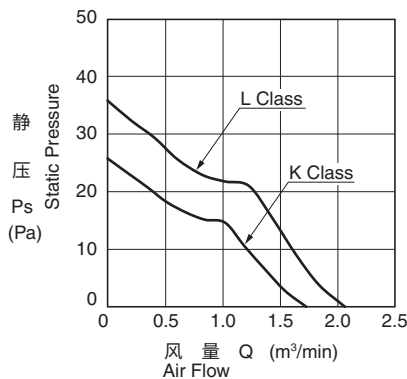

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(绿色)UL94HB
轴承	: 滚珠轴承
导线	: UL1007 AWG26 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Green) UL94HB
Bearing	: Ball Bearing
Lead Wire	: UL1007 AWG26 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max. Air Flow (m ³ /min)*1 (CFM)*1	最大静压 Max. Static Pressure (Pa) (In H ₂ O)	噪音 Noise (dB)*1	重量 Mass (g)
12539JE-12K-BA-	F0	12	7 ~ 14.0	0.16	1.92	2080	1.76 62.1	25.4 0.10	32.0	190
12539JE-12L-BA-	F0		7 ~ 13.2	0.24	2.88	2300	2.12 74.9	36.3 0.15	34.0	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air