

15047JA for Condenser

DC Axial Fan


150[□]X47^L



■ 一般规格 General Specifications

- 电机保护: 自动复位
Motor Protection: Auto Restart
- 绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
- 绝缘耐压: AC700V 1s
Dielectric Withstand Voltage
- 容许环境温度范围: J CLASS: -10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range: KCLASS: -10°C ~ +60°C (Operating)
-40°C ~ +70°C (Storage)
- 正常使用状态下应无结露
non-condensing environment

■ 外观图 Outline

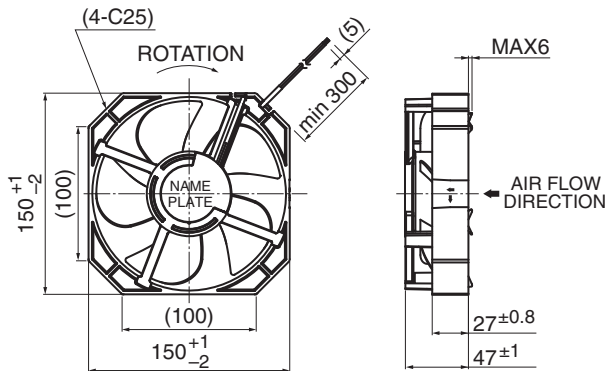


■ 预期寿命 Expected Life


※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
25°C 100,000小时 (Hours)

■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)



■ 特性曲线 Characteristic Curves

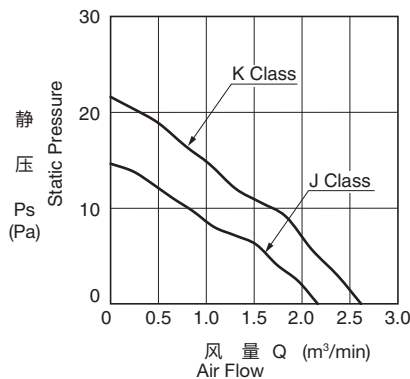

■ 材质 Material

- 壳体 : 塑料(黑色)UL94V-0
叶轮 : 塑料(黑色)UL94V-0
轴承 : 滚珠轴承
导线 : UL1007 AWG24 +: 红 -: 黑
- Casing : Plastic (Black) UL94V-0
Impeller : Plastic (Black) UL94V-0
Bearing : Ball Bearing
Lead Wire: UL1007 AWG24 +: Red, -: Black

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max.Air Flow (m³/min)*1 (CFM)*1	最大静压 Max. Static Pressure (Pa) (In H ₂ O)*1	噪音 Noise (dB)*1	重量 Mass (g)
15047JA-12J-YA-	00	12	8.0 ~ 13.8	0.12	1.44	1150	2.15 75.9	14.6 0.06	25.5	315
15047JA-12K-YA-	00			0.19	2.28	1400	2.60 91.8	21.5 0.09	32.0	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air