

17240JA for Condenser

DC Axial Fan

172[□]X40^L




一般规格 General Specifications

电机保护:	自动复位
Motor Protection:	Auto Restart
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	-10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment


预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
25°C 100,000小时(Hours)

外观图 Outline

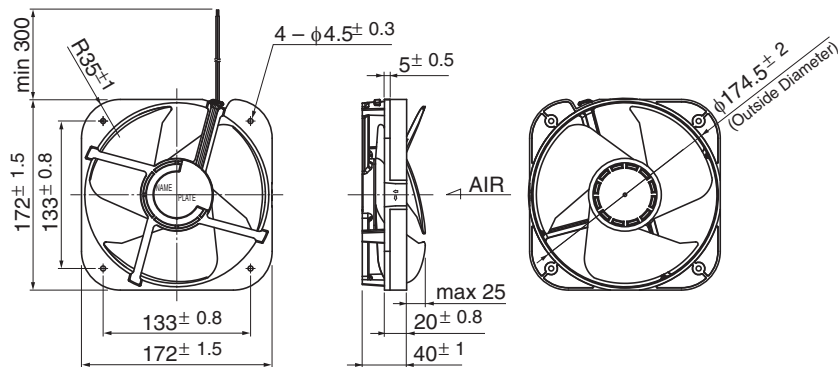

特性曲线 Characteristic Curves

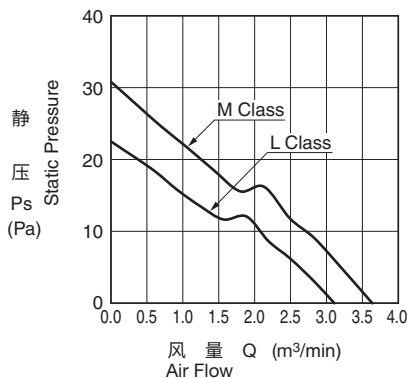

材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 滚珠轴承
导线	: UL1007 AWG24 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Ball Bearing
Lead Wire	: UL1007 AWG24 +: Red, -: Black

规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max. Air Flow (m³/min)*1 (CFM)*1	最大静压 Max. Static Pressure (Pa)*1 (In H ₂ O)*1	噪音 Noise (dB)*1	重量 Mass (g)
17240JA-12L-YA-	00	12	10.0 ~ 13.2	0.11	1.32	1350	3.10 109.5	22.4 0.09	29.5	325
17240JA-12M-YA-	00			0.16	2.92	1550	3.63 128.2	30.7 0.12	33.5	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air