


2004KL

DC Axial Fan Ball Bearing


50[□]X10^L



■ 外观图 Outline

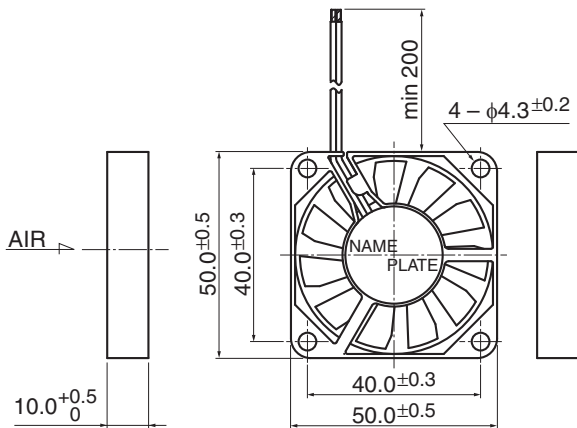

■ 特性曲线 Characteristic Curves

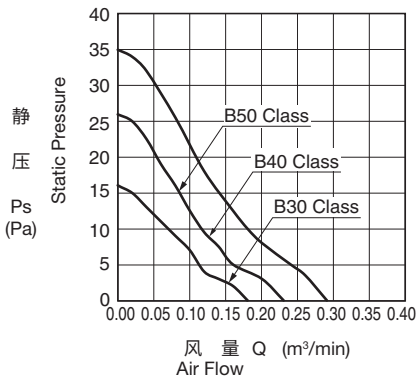

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压	工作电压范围	额定电流	额定输入	额定转速	最大风量		最大静压		噪音	重量
		Rating Voltage	Operating Voltage	Current	Input Power	Speed	Max. Air Flow		Max. Static Pressure		Noise	Mass
		(V)	(V)	(A)* ¹	(W)* ¹	(min ⁻¹)* ¹	(m ³ /min)* ¹	(CFM)* ¹	(Pa)* ¹	(In H ₂ O)* ¹	(dB)* ¹	(g)
2004KL-01W-B30-	B00	5	4.5 ~ 6.0	0.10	0.50	3500	0.18	6.4	16.0	0.06	23.0	20
2004KL-01W-B40-	B00			0.16	0.80	4500	0.23	8.1	26.0	0.10	28.5	
2004KL-01W-B50-	B00			0.30	1.50	5500	0.29	10.2	35.0	0.14	35.0	
2004KL-04W-B30-	B00	12	10.2 ~ 13.8	0.04	0.48	3500	0.18	6.4	16.0	0.06	23.0	
2004KL-04W-B40-	B00			0.07	0.84	4500	0.23	8.1	26.0	0.10	28.5	
2004KL-04W-B50-	B00			0.10	1.20	5500	0.29	10.2	35.0	0.14	34.0	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air


■ 一般规格 General Specifications

电机保护: 自动复位、反接保护
Motor Protection: Auto Restart / Polarity Protection
绝缘电阻: 用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance: 10MΩ or over with a DC500V Megger
绝缘耐压: AC700V 1s
Dielectric Withstand Voltage
容许环境温度范围: -10°C ~ +70°C (Operating)
Allowable Ambient Temperature Range: -40°C ~ +70°C (Storage)
正常使用状态下应无结露
non-condensing environment

■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
25°C 60,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

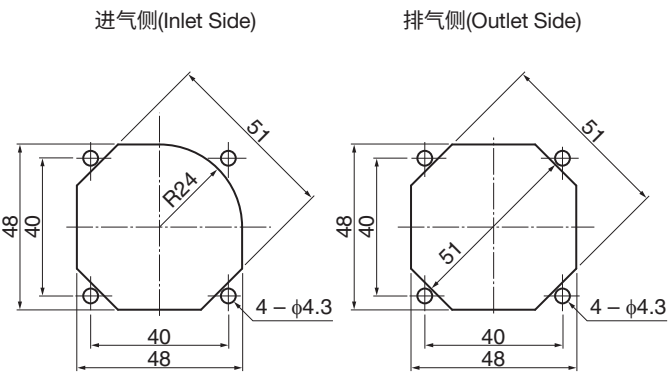

■ 材质 Material

壳体 : 塑料(黑色)UL94V-0
叶轮 : 塑料(黑色)UL94V-0
轴承 : 滚珠轴承
导线 : UL1061 AWG26 +: 红 -: 黑
Casing : Plastic (Black) UL94V-0
Impeller : Plastic (Black) UL94V-0
Bearing : Ball Bearing
Lead Wire: UL1061 AWG26 +: Red, -: Black