


2404KL

DC Axial Fan Ball Bearing


60[□]X10^L



■ 外观图 Outline

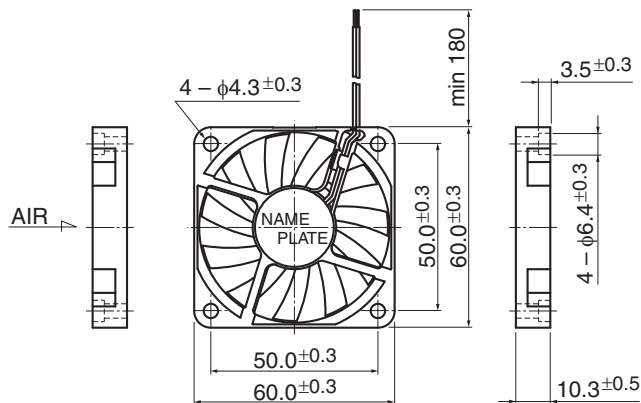

■ 特性曲线 Characteristic Curves

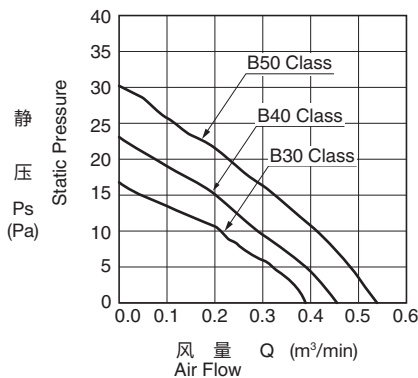

■ 规格 Specifications

型号 Model	管理编号 Product No.	额定电压 Rating Voltage (V)	工作电压范围 Operating Voltage (V)	额定电流 Current (A)*1	额定输入 Input Power (W)*1	额定转速 Speed (min ⁻¹)*1	最大风量 Max. Air Flow (m³/min)*1 (CFM)*1	最大静压 Max. Static Pressure (Pa)*1 (In H ₂ O)*1	噪音 Noise (dB)*1	重量 Mass (g)
2404KL-04W-B30-	B00	12	10.2 ~ 13.8	0.10	1.20	3600	0.39 13.8	16.7 0.07	29.0	25
2404KL-04W-B40-	B00			0.20	2.40	4200	0.46 16.2	23.0 0.09	33.0	
2404KL-04W-B50-	B00			0.27	3.24	4800	0.54 19.1	30.1 0.12	36.0	

旋转方向: 从标签方向观察时为顺时针方向 Rotation: Clockwise as seen from the label side
送风方向: 标签侧 Airflow Outlet: Label side

*1: Average Values in Free Air

■ 一般规格 General Specifications

电机保护:	自动复位、反接保护
Motor Protection:	Auto Restart / Polarity Protection
绝缘电阻:	用DC500V兆欧表测量, 应在10MΩ以上
Insulation Resistance:	10MΩ or over with a DC500V Megger
绝缘耐压:	AC700V 1s
Dielectric Withstand Voltage:	
容许环境温度范围:	B30, B40 CLASS: -10°C ~ +70°C (Operating)
	B40 CLASS : -10°C ~ +60°C (Operating)
Allowable Ambient Temperature Range:	-40°C ~ +70°C (Storage)
	正常使用状态下应无结露 non-condensing environment


■ 预期寿命 Expected Life

※故障率10% (L10 使用寿命)
※Failure Rate: 10% (L10 Life)
25°C 60,000小时(Hours)

■ 安装孔参考图 Panel Out-cuts

进气侧(Inlet Side)

排气侧(Outlet Side)

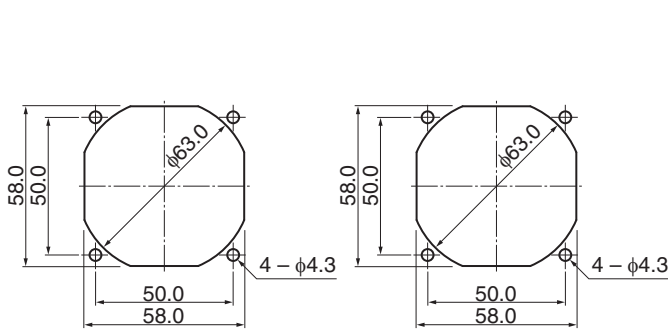

■ 材质 Material

壳体	: 塑料(黑色)UL94V-0
叶轮	: 塑料(黑色)UL94V-0
轴承	: 滚珠轴承
导线	: UL1061 AWG26 +: 红 -: 黑
Casing	: Plastic (Black) UL94V-0
Impeller	: Plastic (Black) UL94V-0
Bearing	: Ball Bearing
Lead Wire	: UL1061 AWG26 +: Red, -: Black